




Add: 4/F.,Xinnuo Building, Neihua Rd.,Nanshan District, Shenzhen 518052, China.
 Tel: 0086 755 26284440 Fax: 0086 755 26415850
 Site: www.skymicrowave.com Email: sales@skymicrowave.com

The specification and outline drawing of

Power combiners/splitters

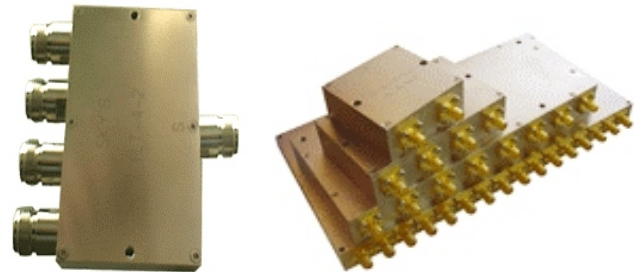

Model	Freq. Range (Ghz) F _L -F _U	Insertion Loss(dB)			Isolation (dB)			VSWR	Unbalance							
		L	M	U	L	M	U		Phase (Deg)			Amplitude(dB)				
									Typ/Max	Typ/Max	Typ/Max	Typ/Min	Typ/Min	Typ/Min	Typ/Max	Max
FLT-4-2500S	0.8-2.5		0.6/1.2			25/20		1.2/1.5		5			0.5			

Notes:

- a. Input and output impedance: 50 Ohms
- b. Connector: SMA-F
- c. Output power: ≤1w
- d. Case material:Aluminum alloy with Nickel-plating. And the logo/marks carved by laser.
- e. Guarantee:12months
- f. Operation temperature:-35C-+80C deg

