




Add: 4/F.,Xinnuo Building, Neihua Rd.,Nanshan District, Shenzhen 518052, China.
 Tel: 0086 755 26284440 Fax: 0086 755 26415850
 Site: www.skymicrowave.com Email: sales@skymicrowave.com

The specification and outline drawing of

Power combiners/splitters

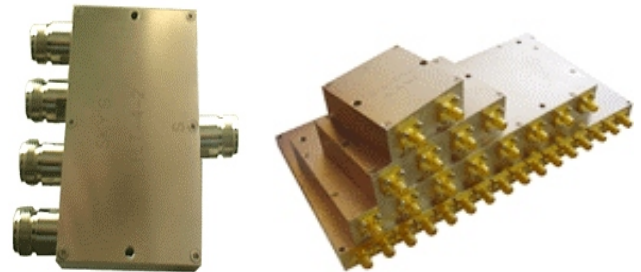

Model	Freq. Range (Ghz) FL-fU	Insertion Loss(dB)			Isolation (dB)			VSWR	Unbalance							
		L	M	U	L	M	U		Phase (Deg)			Amplitude(dB)				
									Typ/Max	Typ/Max	Typ/Max	Typ/Min	Typ/Min	Typ/Min	Typ/Max	Max
FLT-4-6	5.9-6.45		0.6/1.3			30/18		1.2/1.5		8			0.7			

Notes:

- Input and output impedance: 50 Ohms
- Connector: N-F or SMA-F
- Power: 1w
- Case material: Aluminum alloy with Nickel-plating. And the logo/marks carved by laser
- Guarantee: 12 months
- Operation temperature: -35C-+80C deg

